

SecuMaster

Web Based Fingerprint Single Door Controller

Access control / Time attendance system :
Entrance security, work place time attendance for fingerprint

SMF - 630



Security, Access Control, Time attendance management

SMF-630 is a Fingerprint & RFID identification controller. It can be working as a standalone mode or connecting with PC thru TCP/IP as a networking mode (using Web browser for management) or to be a Fingerprint reader when connecting with multi-door controllers.

Feature :

- ▶ Standalone mode or Reader mode.
- ▶ Optical sensor & OSD menu.
- ▶ Voice indication (Option).
- ▶ Door Bell support.
- ▶ Support WG in & Out. (Fire Alarm Door Contact).
- ▶ USB device for Access Log. (Option)
- ▶ Built-in http browser.
- ▶ Real-Time system monitor.
- ▶ Double badges and dual-doors interlocking
- ▶ Unlimited level Anti-Pass-Back.
- ▶ Fingerprint + Pin/Card + Password / Lock Release / Exit button Time Zone
- ▶ Available for 50 Holidays, 40 Sets of Function keys, 32 Departments, Designations, Groups, 64 Time Sett, Time Zones.
- ▶ Time server adjustment.



Specification :

- ▶ Verification option : Fingerprint, Fingerprint + Card, Fingerprint + Pin, Card + Pin, Fingerprint + Card + Pin
- ▶ Verification Mode : 1 : 1 / 1 : N
- ▶ Verification Time : Less than 2.0 sec
- ▶ Registration Time : Less than 3.0 sec
- ▶ Capacity : 950 persons, totally 1900 templates (2templates / User)
- ▶ Access Log data : 32.768
- ▶ System Log : 2.000
- ▶ Relay output x 2 , Reset button x 1 , Sensor input x 1
- ▶ Communication interface : RS - 485 TCP/IP (reserved for internetworking)
Wiegand in & Out : 26 / 34 bit
- ▶ Communication speed : Ethernet 10/100M, Auto crossover.
- ▶ Card format : 125 KHz (EM/TM) ; 13.56 MHz
- ▶ Reading range : 7 - 12 cm (EM/TM), 3-5 cm (Mifare)
- ▶ Language : Traditional / Simple Chinese / English
- ▶ Keypad : 10 numeric keys (0-9) + function keys
(F1 - F4, # , *) & Door Bell
- ▶ Display : 128 x 64 Dots LCD
- ▶ Operation Temperature : 0°C - 65°C
- ▶ Operation Humidity : 5 - 95% RH
- ▶ Weight : 360g
- ▶ Power : DC 9 - 24V, 1A
- ▶ Dimension : 125 x 145 x 35 mm

Configurations :

▶ Standalone

For more secure and external sensor, SMF-20 or SMF-50 options.

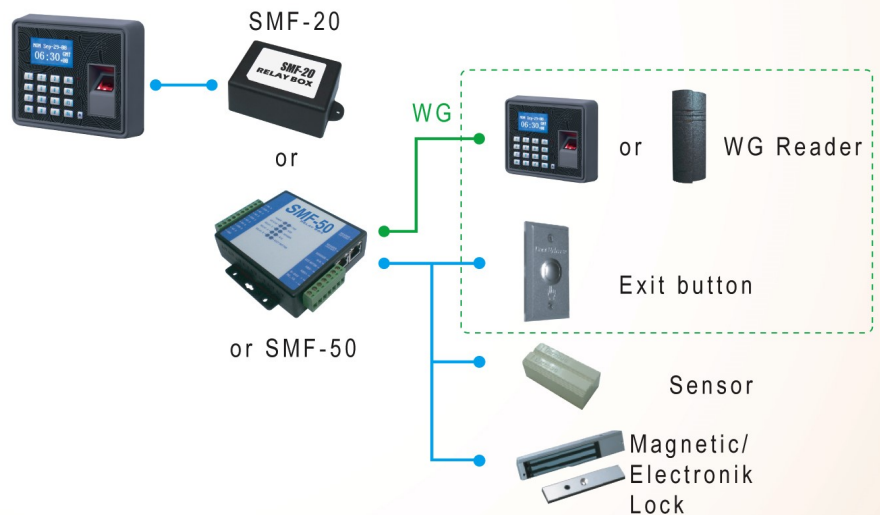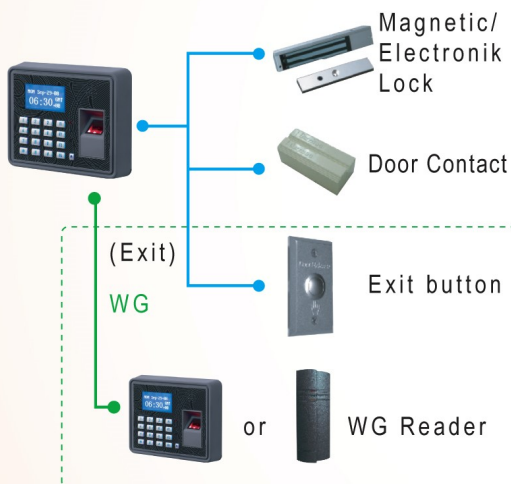

▶ To be a Fingerprint Reader

